

AseptoEco

Description

Powerful alkaline cleaner free of nitrogen, phosphorus and chlorine for milking equipment and milk tanks.

Strengths

AseptoEco is based on sodium and potassium hydroxide and assures effective cleaning of milking equipment.

The application of **AseptoEco** provides the following key benefits:

- Effective cleaning properties
- Free from nitrogen, phosphorus and chlorine
- Low use concentration
- Good material compatibility
- Low foaming, also for high water hardness

Properties

Appearance:	Light yellow liquid
Key ingredient(s):	Sodium Hydroxide, Potassium Hydroxide
pH at 20°C:	12.1 – 12.7
Density at 20°C(g/cm ³):	1.325 - 1.365
Storage temperature:	-20°C to +40°C

Application

What:	Milking equipment cleaner
When:	Milking installation: after milking Milk tanks: after emptying
How:	Pre-clean with water. Clean with AseptoEco . Rinse with water of drinking quality.
Use concentration:	0.3 - 0.5% (minimum 10 min. at 40°C - 50°C)
Recommendation:	To be used in daily rotation with HorolithEco .

Material compatibility

AseptoEco is compatible with the commonly used materials of milking equipment.


Monitoring

Concentration determination

Titration	Receiving flask:	100 ml application solution
	Titration solution:	0.5N HCl
	Indicator:	Thymol blue (0.04% in ethanol)
	Titration factor:	0.08
	color change:	Adding of 0.5g Na ₂ S ₂ O ₃ blue → yellow
	Volume added in ml (0.5N HCl) x 0.08 = % AseptoEco	

Conductivity Specific conductivity of **AseptoEco**

AseptoEco (FC 906993)
Spec. Conductivity (20 °C, 0 °d)
Temperature coefficient: α 1.8 %/°C

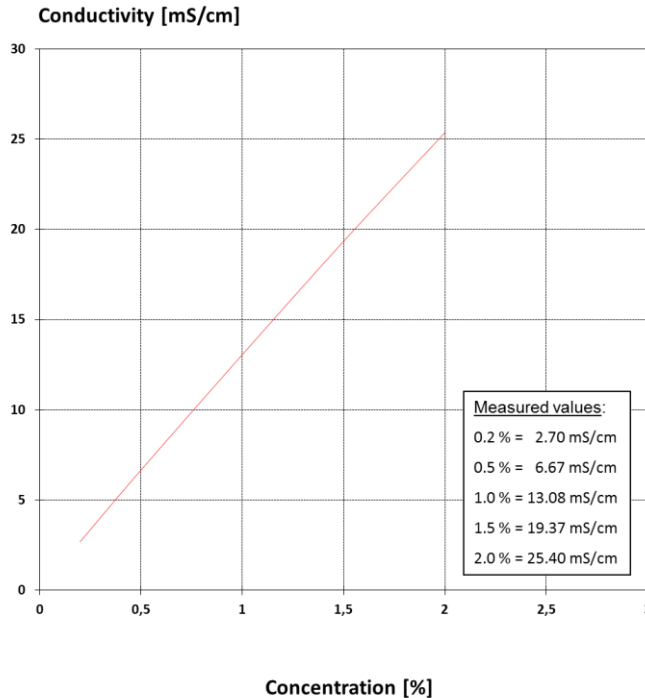

Safety & Precautions

The relevant hazards identifications of **AseptoEco** are given in the EC Safety Data Sheet. If any questions arise in this context please contact your Ecolab representative.

Keep container tightly closed after use. Store in original container between -20°C and +40°C. Do not empty product into drain. Dispose of packaging only if emptied and closed.

Always read the label and product information before use.

The statements, information and data presented herein are believed to be accurate and reliable. The information describes the characteristic features of **AseptoEco** in ordinary use but can not be taken as a guarantee, express warranty or implied warranty for the suitability for a particular purpose and shall not extend mandatory warranty rights (if any). The specifications and performance may vary subject to the operational conditions. Since numerous parameters will influence product performance and applicability, this information does not exonerate the user from liability with respect to the suitability of the product and the appropriate safety measures to be taken. Moreover, a possible infringement of patent rights must be avoided at all times.

(Version January 2019)