

HorolithEco

Description

Powerful acidic cleaner free of nitrogen, phosphorus and chlorine for milking equipment and milk tanks.

Strengths

HorolithEco is a liquid, acidic product for descaling and cleaning of milking equipment.

The application of **HorolithEco** provides the following key benefits:

- Effective cleaning properties
- Prevents build up of milk stone and iron deposits
- Free of nitrogen, phosphorus and chlorine
- Good material compatibility
- Low foaming, also with high water hardness

Properties

Appearance:	Colourless liquid
Key ingredient(s):	Inorganic and organic acid
pH at 20°C:	0.0 – 1.0
Density at 20°C (g/cm ³):	1.160 - 1.175
Storage temperature:	-10°C to +40°C

Application

What:	Milking equipment cleaner
When:	Milking installation: after milking Milk tanks: after emptying
How:	Pre-clean with water. Clean with HorolithEco . Rinse with water of drinking quality.
Use concentration:	0.3 - 0.5% (minimum 10 min. at 40°C-50°C)
Recommendation:	To be used in daily rotation with AseptoEco .

Material compatibility

HorolithEco is compatible with the commonly used materials of milking equipment.

Monitoring


Concentration determination

Titration	Receiving flask:	100 ml application solution
	Titration solution:	1N NaOH
	Indicator:	Thymol blue (0.04% in ethanol)
	Titration factor:	0.192
	color change:	yellow → blue

Volume added in ml (1N NaOH) x 0.192 = % **HorolithEco**

Conductivity Specific conductivity of **HorolithEco**

HorolithEco (FC 908561)
Spec. Conductivity (20 °C, 0 °d)
Temperature coefficient: α 0.81 %/°C

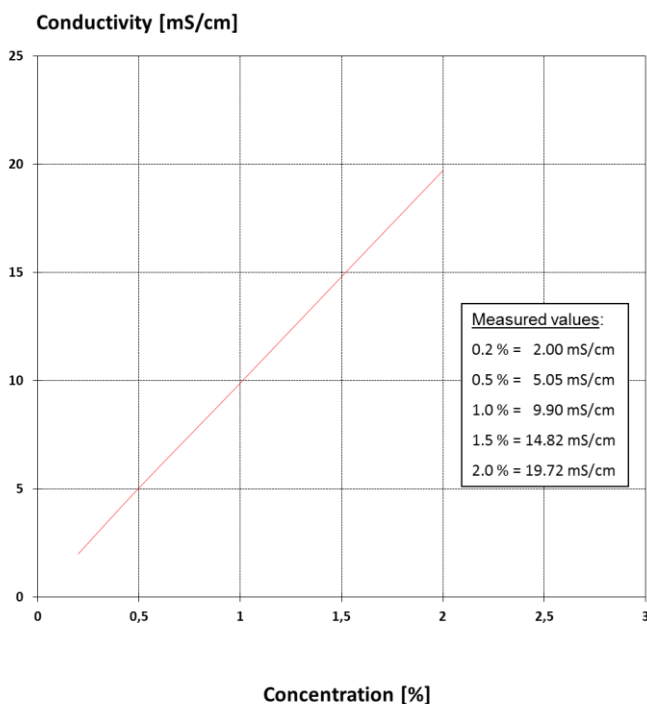

Safety & Precautions

The relevant hazards identifications of **HorolithEco** are given in the EC Safety Data Sheet. If any questions arise in this context please contact your Ecolab representative.

Keep container tightly closed after use. Store in original container between -10°C and +40°C. Do not empty product into drain. Dispose of packaging only if emptied and closed.

Always read the label and product information before use.

The statements, information and data presented herein are believed to be accurate and reliable. The information describes the characteristic features of **HorolithEco** in ordinary use but can not be taken as a guarantee, express warranty or implied warranty for the suitability for a particular purpose and shall not extend mandatory warranty rights (if any). The specifications and performance may vary subject to the operational conditions. Since numerous parameters will influence product performance and applicability, this information does not exonerate the user from liability with respect to the suitability of the product and the appropriate safety measures to be taken. Moreover, a possible infringement of patent rights must be avoided at all times.

(Version October 2018)